


AC220V SMD3030 LED BAR

LED RIGID BAF


LED MODULE

LED STRIPS

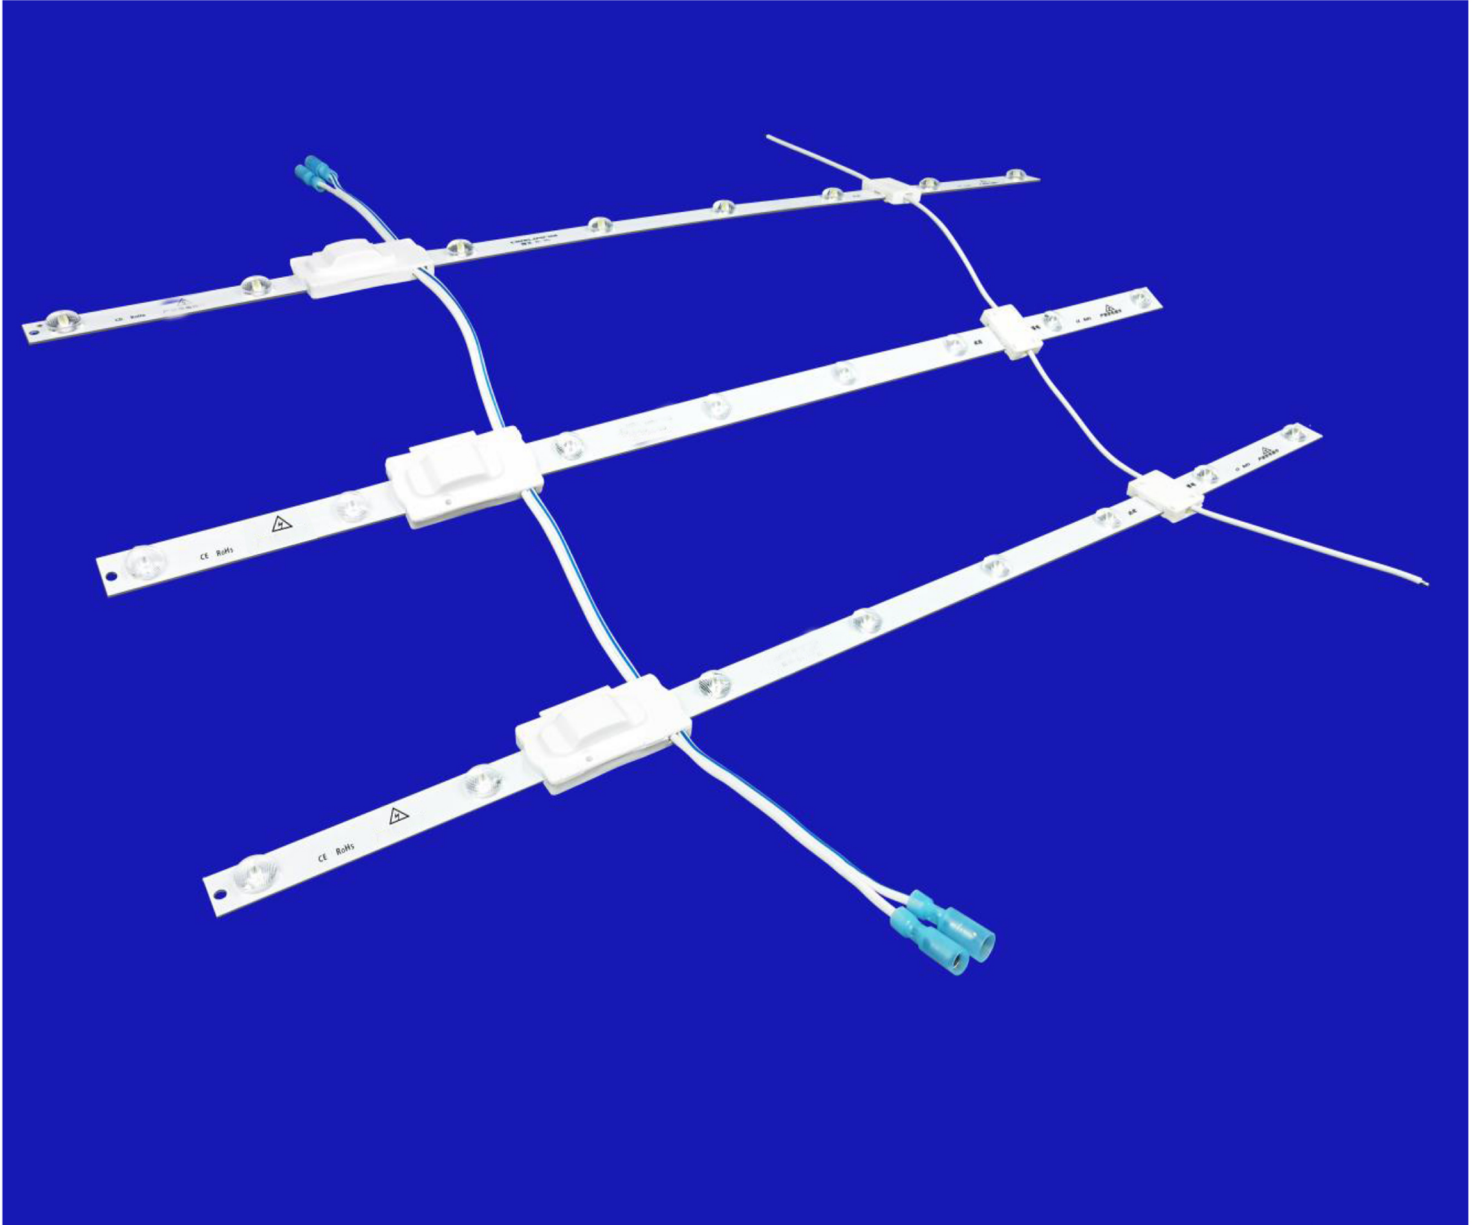

Model	Size	Voltage	Rated Power	LED Qty	Luminous flux	CCT	Wire
DG-YC-8D	650*17*1.0mm	AC85-260V	6.5W	8LEDs	1040LM	14000K	20CM
DG-YC-14D	1100*17*1.0mm	AC85-260V	12W	14LEDs	1820LM	14000K	20CM
CRI	RA>80		IP Grade		IP20		
LED CHIP	SMD3030		Lifetime		50000Hrs		
Beam Angle	172° PMMA Lens		Application Temp.		-25° -60°		
Certificate	CE/RoHS		Warranty		2years		
Application	6-25CM depth light box		Packing		240pcs/ctn		
Max connection	10strips/string		Box Size		106*36*22cm		

Installation Guide

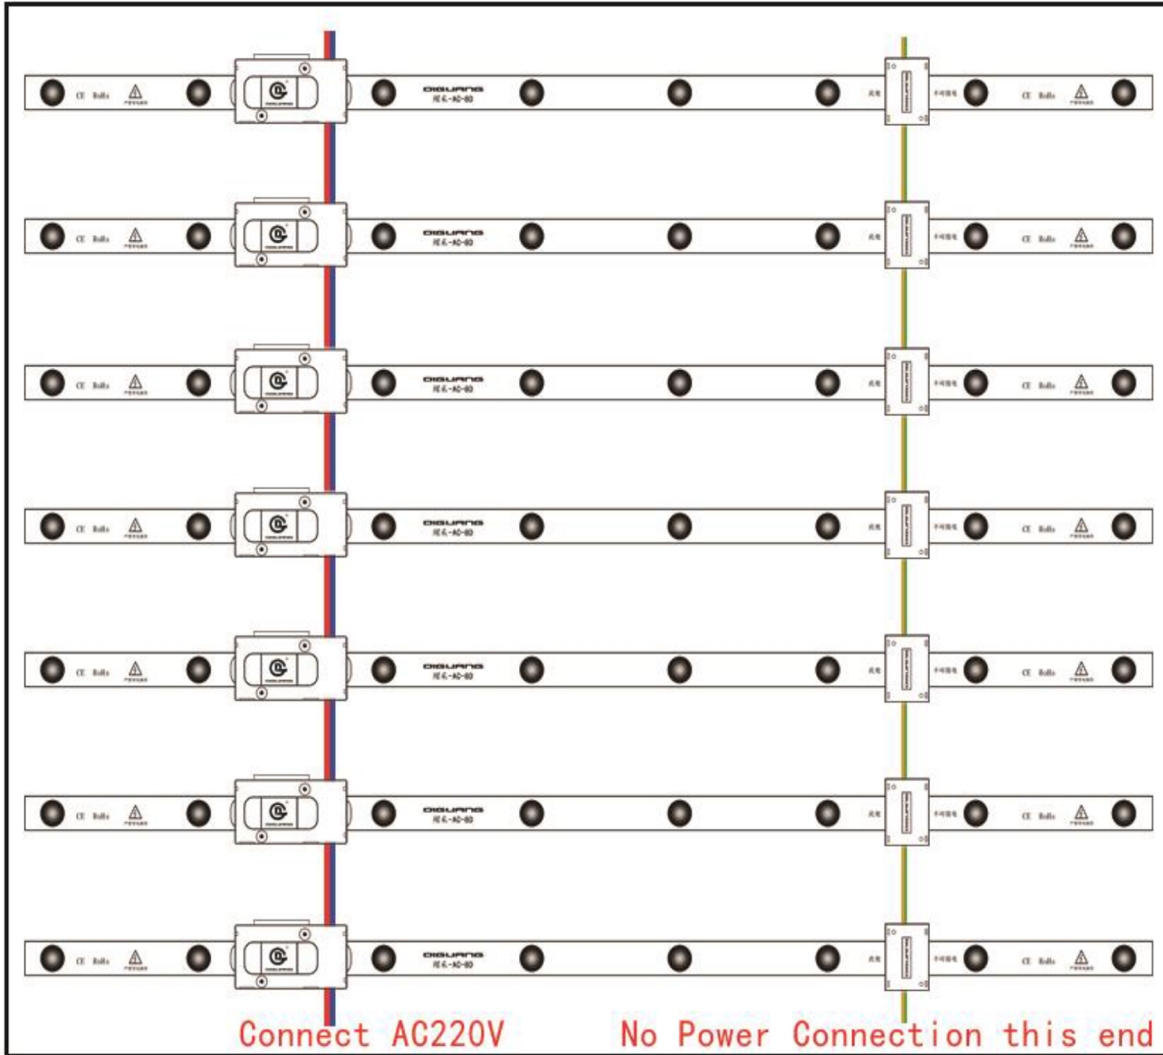

TIPS:

- 1.The power supply is driven by constant current (disassembly is prohibited),Do not operate with power on.
- 2.This product can not be cut, the panel can not be punched
- 3.Please use leakage protection switch after installation of the light box, the yellow line is not connected to electricity.
- 4.Max series connection is 100 meter.
- 5.The bar cannot be installed on the conductive back plate, such as aluminum plate, iron plate, aluminum alloy plate